

# ER34615M/W200: D Size Spiral Cell

## Technical Datasheet



Technical Specifications	
Part No.	1000098
Cell Type	Primary, non-rechargeable
Chemistry	Lithium Thionyl Chloride
Voltage Range	2.0 to 3.7V
Nominal Voltage	3.6V
Nominal Capacity	14.5Ah @ 10mA to 2.0V @ 20°C
Max. Continuous Discharge Current	2000mA continuous
Max. Pulse Discharge Current	Up to 3000mA (life and temperature dependent)
Weight	107g
Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C (max 30°C for a >5 years life)
Exterior/Housing	Black heatshrink
Terminals/Connector	200mm flying leads with Molex 5264 Connector
Safety	AL-MSDS/RD-002 Material Safety Datasheet - MSDS041 Safety Guide UBM-5112
Transportation	Class 9 - A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.

Quality Assurance	AceOn manufacturing facilities are ISO 9001:2008 registered. This product is listed under the Component Recognition Program of Underwriters Laboratories (UL) and has passed UN transportation testing, which is required for international transportation of all lithium batteries.
-------------------	---

### Features

- High and flat operating voltage
  - High power and higher energy for the whole battery life
- High drain capability
  - Higher power applications
- Low self-discharge rate (<1% per year at 20°C)
  - Battery life higher than 10 years, depending on the application
- Hermetic glass-to-metal sealing
  - Avoid leakage, key for higher than 10 year battery life
- Non-flammable electrolyte
  - Safer operation in case of abuse
- PTC device
  - Safe operation in the event of a short circuit


### Typical Applications

Battery for MCS-710, MCS-720, MCS-730 [0-9912-K], Visonic,


3V Lithium Replacement battery with flying leads and connector for the Bell/Siren Box.

Univercell by:-  
 AceOn Battery Solar Technology Ltd  
 Unit 9B, Stafford Park 12, Telford,  
 TF3 3BJ  
 Tel: +44(0)1952 293388


# Dimensions

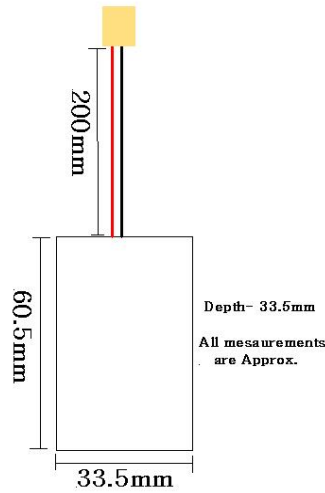

# Typical Performance Graphs

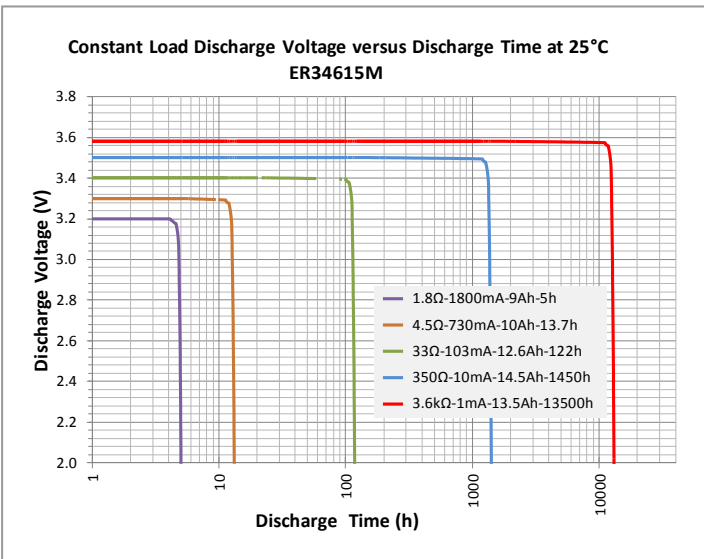

High and flat voltage at high and low drain

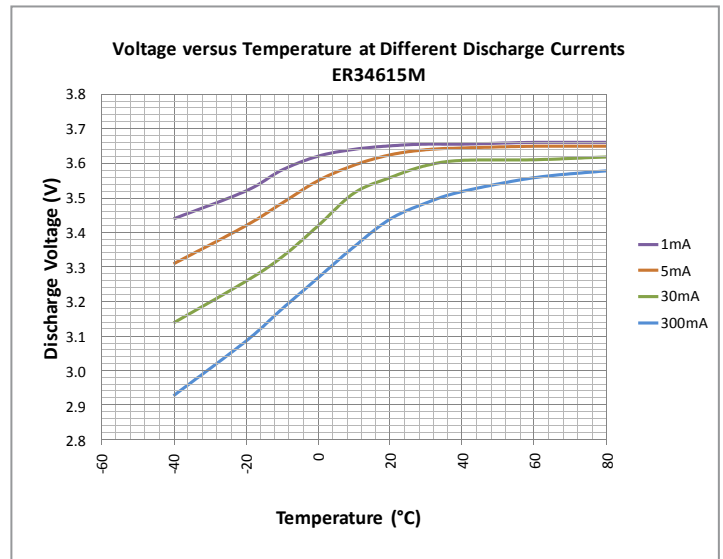

High voltage at high drain even at -30°C



Univercell by:-

AceOn Battery Solar Technology Ltd

Unit 9B, Stafford Park 12, Telford,

TF3 3BJ

Tel: +44(0)1952 293388

V2 250918