


Model No.: **GPCR2**

NO MERCURY ADDED	
Description	: Lithium Battery, CR2
Chemical System	: Lithium Manganese Dioxide
Nominal Voltage	: 3.0 Volts
Nominal Capacity	: 800mAh (Discharge at 10mA to 1.8V at 23°C)
Dimensions	: Ø15.3 mm x 26.5 mm
Terminals	: Flat
Jacket	: PVC Resin Label
Shelf Life	: Up to 10 years
Average Weight	: App. 10g
Application	: Smoke Detector, Sensors, Home Security Products
Operating Temperature	: -40°C to 60°C

Cross References:


GP	Duracell
CR2	DLCR2

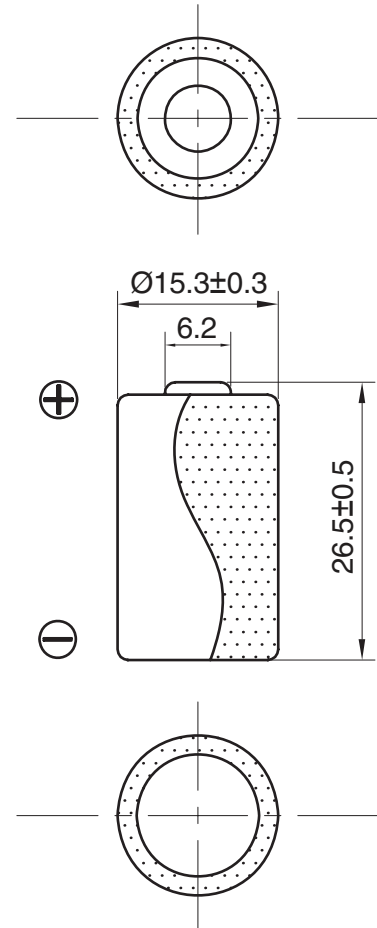


Label Area

Unit : mm

Discharge Characteristics
900mA, 3 seconds on / 27 seconds off

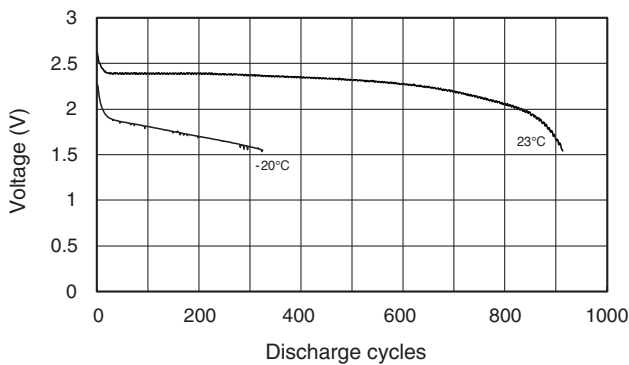

Continuous Discharge at 23°C

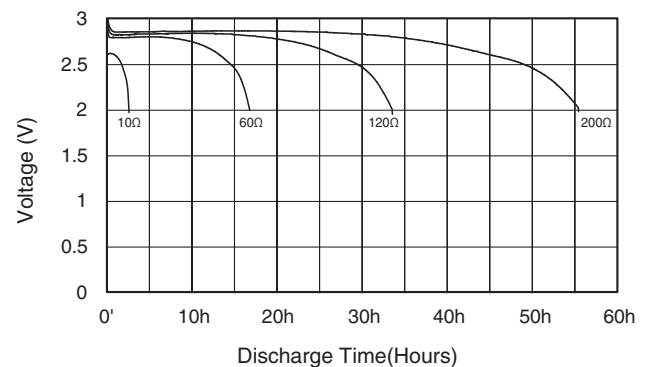

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.